



Tri-folding Wireless Keyboard with Touchpad

IC-BK08

User Manual

www.iclever.com


Package contents

1. Foldable Aluminium Bluetooth Keyboard
2. User Manual
3. USB Charging Cable
4. Carrying Bag
5. Warranty Card

Bluetooth Keyboard Features

1. Built-in USA BROADCOM Bluetooth module 3.0.
2. Suitable for Android& Windows& iOS systems tablets, smartphones etc.
3. With multi - point touchpad function.
4. Magnetic power on/off design,easy and flexible to operate.
- 5.Tri-fold design,convenient to carry.
6. Can pair with 3 Bluetooth devices simultaneously ,easy to change among them.
7. MICRO interface,easy to charge.
8. Built-in rechargeable lithium battery.
9. Light weight, quiet keystrokes.
10. Energy saving keyboard with sleep mode.
11. Front:Plastic. Back:Aluminum alloy.

Indicator LED Light Analysis

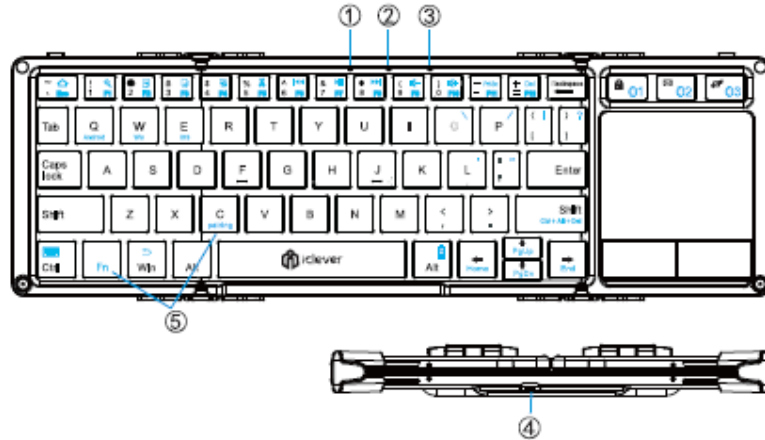

- Power Indicator ①②③: All 3 indicators light up in blue color for 3s.
- Charging Indicator ①: It lights up in red color when the keyboard is charging and turns off once fully charged.
- Low Battery Indicator ①②③: All 3 indicators flash in red when it is time to recharge.
- Bluetooth Indicator ①②③: ① / ② / ③ indicator flashes in blue color when the first / second / third device is waiting for pairing and lights up blue sturdily after it has been paired successfully.
- Micro Charging Port ④: Used for charging the keyboard.
- Pairing Keys ⑤: After ⑤ combination keys being pressed together, ① / ② / ③ indicator flashes in blue color and slowly flashes 3 times for reconnecting.

Bluetooth Keyboard Pairing

Step 1. Power the keyboard on by unfolding it, ❶ light flash blue quickly and ❷ and ❸ turn blue.

Step 2. Search for Bluetooth devices on your tablet or smartphone. Refer to its user manual if needed.

Step 3. Find the Bluetooth name "iClever IC-BK08 Keyboard" and click for connection.

Step 4. The corresponding Bluetooth indicator lights up blue constantly after successfully paired.
















Step 5. To pair with 2nd device, press Fn+ ❷ key. ❷ LED flash quickly blue. Follow step 2.3.4 to finish pairing.



Step 6. To pair with 3rd device, press Fn+ ❸ key. ❸ LED flash quickly blue. Follow step 2.3.4 to finish pairing.











Keys and Functions

To use the shortcut keys, hold the "Fn" key while pressing the desired shortcut key on the Android or iOS tablets.


For the Windows tablets, press and hold the "Fn" + "Shift" keys while pressing the desired function keys.

| | Fn on Android | Fn on Windows | Fn+Shift on Windows | Fn on iOS |
|---|----------------|--------------------|---------------------|------------------|
|  | Home | Esc | Web browser | Home |
|  | Search for | F1 | Search for | Search for |
|  | Select all | F2 | Select all | Select all |
|  | Copy | F3 | Copy | Copy |
|  | Paste | F4 | Paste | Paste |
|  | Cut | F5 | Cut | Cut |
|  | Previous track | F6 | Previous track | Previous track |
|  | Play/pause | F7 | Play/pause | Play/pause |
|  | Next track | F8 | Next track | Next track |
|  | Volume down | F9 | Volume down | Volume down |
|  | Volume up | F10 | Volume up | Volume up |
|  | N/A | Screen shot | N/A | N/A |
|  | N/A | N/A | N/A | Keyboard display |
|  | Back | N/A | N/A | N/A |
|  | Power Display | Power Display | N/A | Power Display |
| Ctrl+Alt+Del | N/A | Start task manager | N/A | N/A |


| FN+ | iOS function | Android function | Windows function |
|---|---------------------|---------------------|---------------------|
|  | Pairing | Pairing | Pairing |
|  | Bluetooth channel 1 | Bluetooth channel 1 | Bluetooth channel 1 |


| | | | |
|---|----------------------------------|---------------------|---------------------|
|  | Bluetooth channel 2 | Bluetooth channel 2 | Bluetooth channel 2 |
|  | Bluetooth channel 3 | Bluetooth channel 3 | Bluetooth channel 3 |
|  | Power Display | Power Display | Power Display |
|  | Head of line (N/A in iOS 10) | Head of line | Head of line |
|  | End of line (N/A in iOS 10) | End of line | End of line |
|  | Previous page (N/A in iOS 10) | Previous page | Previous page |
|  | Next page (N/A in iOS 10) | Next page | Next page |
| FN+Shift+  | Reset | Reset | Reset |
|  | FN lock | FN lock | FN lock |
|  | Touchpad on/off | Touchpad on/off | Touchpad on/off |

Fn Lock Key.

Press “

For example, for the iOS tablets, we want to search for sth, normally, we need press

“Fn+

But if we press “

NOTE: Press FN and Q,W or E keys together to shift between Android ,Windows or iOS systems after connected successfully. Otherwise the keyboard’s function key will be invalid.

Q - Android W - Windows E - iOS

SPECIAL NOTE

1. This keyboard doesn't support the Windows Mobile.
2. For Android users: The Caps Lock indicator may not light up, but will still function normally.
3. Apple iOS will not support touchpad mouse function.

How to switch keyboard language

Samsung Android: Shift +Space







Google Android: Ctrl +Space

Windows: Win+Space

iOS 8 or below: Win+Space


iOS 9 or above: Ctrl+Space

Touchpad Function Analysis

| Gesture drawing | Gesture description | Function In Windows | Function In Android |
|---|---|--------------------------------------|--------------------------------------|
|  | One finger click | Mouse left button | Mouse left button |
|  | Slide One finger | Move mouse pointer | Move mouse pointer |
|  | One finger click quickly, hold and drag | Left button to select target to drag | Left button to select target to drag |
|  | Two fingers click | Mouse right button | Mouse right button |
|  | two fingers move vertically or horizontally | vertical, horizontal scroll | vertical, horizontal scroll |
|  | Two fingers move | Zoom in/out | No function |

Balance Stand Opening Steps

With two foot stands on both side to keep balance and stable when typing.

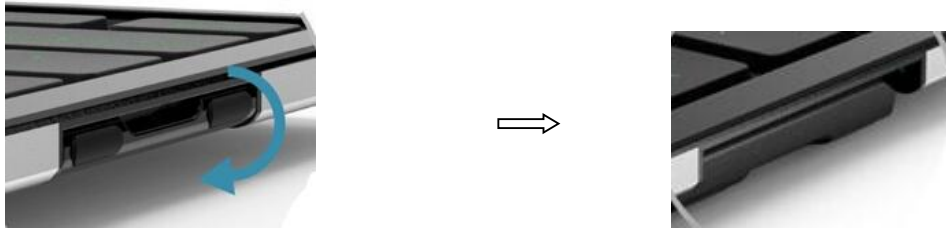

Power Saving Mode

The keyboard will enter sleep mode after being idle for 30 minutes.
To activate it, press any key and wait for 3 seconds.

How to charge it

1. Use the included USB cable for charging. Connect one end to a USB charger, and the other to the keyboard.
2. In charging, the power indicator will turn red. Generally, it takes approximately 2 hours for a full charge. (charger is not included)

Caution

When not in use for a prolonged period of time, it is recommended that you turn off the keyboard to conserve the battery life.

Warning

1. Keep the keyboard away from sharp objects that could damage it.
2. Do not put heavy objects on the keyboard.
3. Do not stretch, twist or apply force to the keyboard.
4. To clean the keyboard, gently wipe it by using a moist cotton cloth.
5. Do not use liquid cleanser.
6. Please do not spill coffee, tea or other liquids on the keyboard.

Specification

| | |
|-------------------------|----------------------|
| Bluetooth Specification | Bluetooth 3.0 |
| Unfolded Dimensions | 278*90.56*5.65mm |
| Folded Dimensions | 158.68*90.56*18.16mm |
| Touchpad dimensions | 55.2*45.8mm |
| Operating Range | Up to 10 meters |
| Net Weight | 220g |
| Modulation System | GFSK |
| Stand-by Time | 90 days |
| Charge Time | < 2 hours |

| | |
|--------------------------|------------------|
| Uninterrupted Work Time | 60 hours |
| Lithium Battery Capacity | 210 mAh |
| Lithium Battery Life | 3 years |
| Key Life | 3 million clicks |
| Front side of keyboard | ABS |
| Back side of keyboard | Aluminum Alloy |